

# ELMO

## HC7501

### 1/2" Color CCD Camera with Frame Accumulation



## Industrial / OEM High Resolution Camera Module

### OVERVIEW

The HC7501 is designed to emulate the performance of a 3CCD camera with a single CCD saving significant cost.

The 1/2" CCD sensor is compatible with most all complimentary optics especially those used with medical/scientific and industrial microscopes.

The frame accumulation feature of the HC7501 makes very low light image capture possible down to texas red in confocal region.

All the controls are accessible by means of an on screen menu making the camera very user friendly.

The Y/C 480 TV(H) lines resolution coupled with a 1.4 lx sensitivity in standard mode (0.0225 lx in automatic accumulation mode) affords video of the highest quality attainable from a single CCD.

There is complete versatility with shutter control both automatic and manual plus backlight compensation with selectable zones.

### FEATURES

- 1/2" IT HAD Color CCD
- 768 (H) x 494 (V) pixels
- 480 TV lines (H) resolution
- 50dB S/N
- Frame accumulation feature
- VBS and Y/C outputs
- Digital signal processing
- External sync
- On screen menu display
- Backlight compensation with selectable zones
- Accepts video or DC type auto iris lenses
- Accepts both CS/C mount lenses



This product is manufactured at the ISO9002 certified factory of ELMO CO., LTD.  
Q 01007

# ELMO

Visualizing technology since 1921

**1/2" Color CCD Camera with Frame Accumulation  
Industrial / OEM High Resolution Camera Module for  
Industrial / Medical / Scientific Use**


# HC7501

## SPECIFICATIONS

Image Sensor	1/2" Interline transfer Color CCD
Effective Pixels	768 (H) x 494 (V)
TV System	NTSC 2:1 Interlaced
Synschronization	Internal / External with automatic change
Resolution	480TVL (H), 350TVL (V)
S/N Ratio	50dB at AGC OFF
Min. Sensitivity	1.4 lx @ F1.2
AGC	18dB, 12dB, 6dB & OFF
White Balance	ATW/Manual/Push-set
Backlight Compensation	Built-in with selectable zones
Electronic Shutter	1/60, 1/100, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000sec
Automatic Shutter	Built-in 1/60 - 1/10,000sec linear
Frame Accumulation	Provided. Max.64 frame in auto mode
On Screen Display Menu	Provided
Video Output	VBS: 1.0Vp-p 75Ω 12P connector and BNC on the back panel Y/C: 12P connector and S-Video terminal on the back panel
External Sync. Input	VBS 1.0Vp-p 75Ω 12P connector on the back panel
Auto Iris	DC/Video, 4P connector on side panel
Lens Mount	CS Mount C / Mount with supplied 5mm ring
Power Source	DC12V (DC11V - 16V) Either 4P or 12P connector on back panel
Dimensions HxHxD	60 x 60 x 140mm (2-1/4 x 2-1/4 x 5-1/2")
Weight	410grm (14.5oz)
Attachments	Owner's manual, Warranty card, 5mm ring, 12P connector, 4P connector for power, 4P DIN for Y/C & 4P connector for auto iris


Note : Design and specifications are subject to change without prior notice.  
Dimensions and weight are approximate.

## PROFILE

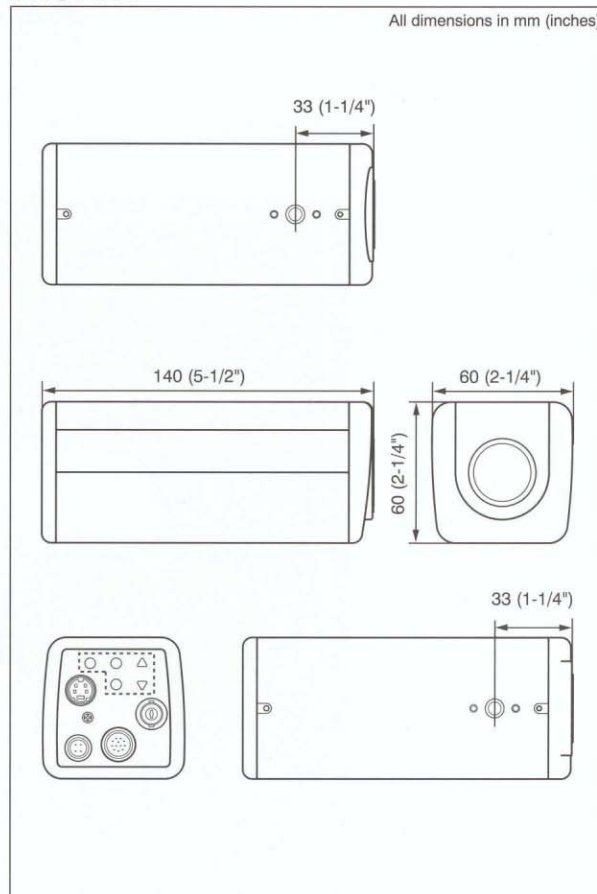


## View of the connectors


### 12P receptacle

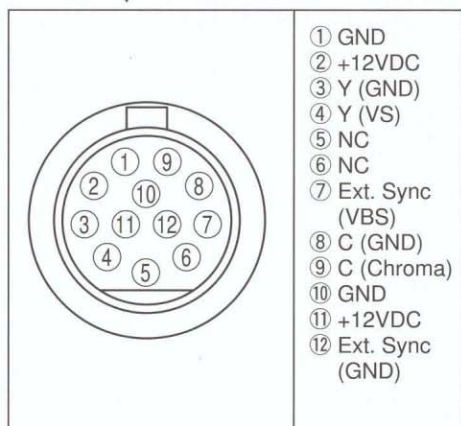

### 4P receptacle

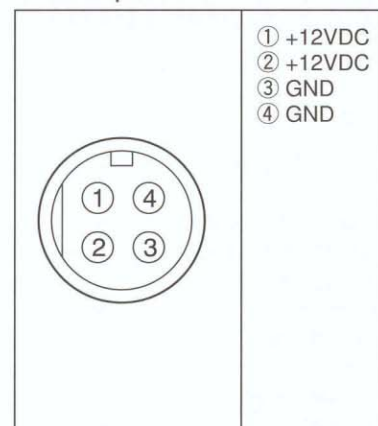

### 4P receptacle for auto iris

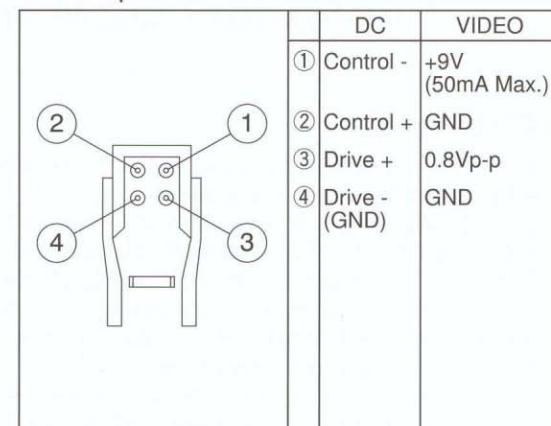

**ELMO ELMO CO., LTD.**

Additional technical information is available from any of the following subsidiary companies;

**ELMO Mfg. Corp.**  
1478 Old Country Road,  
Plainview, NY 11803-5034, U.S.A.  
Tel. 516-501-1400 Fax. 516-501-0429  
E-mail:elmo@elmousa.com  
Web: <http://www.elmousa.com>

**ELMO Canada Mfg. Corp.**  
44 West Drive, Brampton,  
Ontario, L6T 3T6, Canada  
Tel. 905-453-7880 Fax. 905-453-2391  
E-mail:info@elmocanada.com  
Web: <http://www.elmocanada.com>

6-14, Meizen-cho, Mizuho-ku,  
Nagoya, 467-8567, Japan  
E-Mail:foreign-div@elmo.co.jp

Distributed by

**ELMO (Europe) G.m.b.H.**  
Neanderstr 18,  
40233 Düsseldorf, Germany  
Tel. 0211-376051-53 Fax. 0211-376630  
E-mail:elmoeurope@AOL.com  
Web: <http://www.elmo.de/>