


## Wider Applications



## Specifications

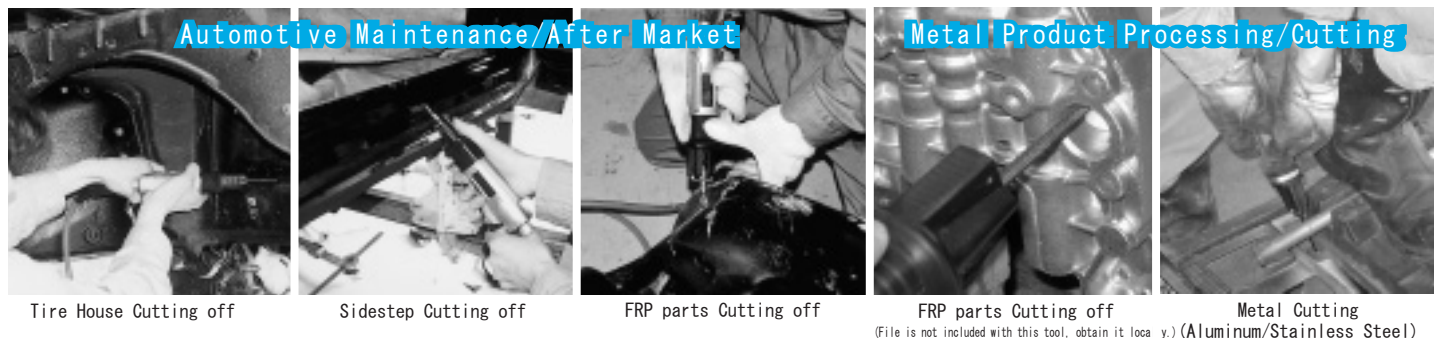

EDP No. 336131

Model No.	※1Cutting Capacity	Air Pressure in Use (Mpa)	Air Consumption (m <sup>3</sup> /min)	Reciprocal Numbers (c. p. m.)	Stroke (mm)	Hose Coupling	※2 O. A. L. (mm)	※3 Weight (g)	Standard Accessories
GT-AS10	Metal Plate ...4mm	0.6	5,000	0.28	10	PT1/4	195.5	900	●Blade (Each 1 pc.) Pitch32 Thin Blade ASB-32T Pitch32 Thick Blade ASB-32H Pitch24 Thick Blade ASB-24H ●L Wrench ●Air Coupling (BPB-2)

※1...Blade No. ASB-32H in Use

※2※3...Standard Accessories excluded.

## Another Quality Air Tools from VESSEL AIR DRILLS

Ideal for Light Drilling over Automotive body drills, Aluminum Thash Window Frame, Housing Wood drilling, etc. Quick Drilling, Easy Chucking, Keyless Chuck (K type only)



EDP No.	Model No.	Drill Capacity (Metal Plate)	Free load R. P. M.	Air Consumption (m <sup>3</sup> /min)	O. A. L. (mm)	Weight (g)
310604	GT-D80-20	φ8mm	2,000	0.35	165	940
310605	GT-D80-20K	φ8mm	2,000	0.35	171	960
310606	GT-D100-15	φ10mm	1,500	0.54	189	1,280
310607	GT-D100-15K	φ10mm	1,500	0.54	195	1,300



WARNING:

- For blade mounting/replacement, be sure the air should be off. Or sudden motor running and unexpected function may serious and dangerous cause to be fatal.
- Select proper blade according to the article to be cut. Do not use worn out blade with the reason of not only lower efficiency but also very dangerous for its breakage to be flipped away.
- Read attached manuals very carefully before use of this tool. And never try to move and or mounting/replacing the blades until you are sure to know of this operation.
- Use this tool with air pressure of 0.5 - 0.6Mpa at the tool. Never apply high pressured air which may cause not only the installed function but also lead to the dangerous level of its function to influence operators safety.

**VESSEL CO., INC.**  
OSAKA, JAPAN

Distributed by: