


## Wide Application



## Specifications

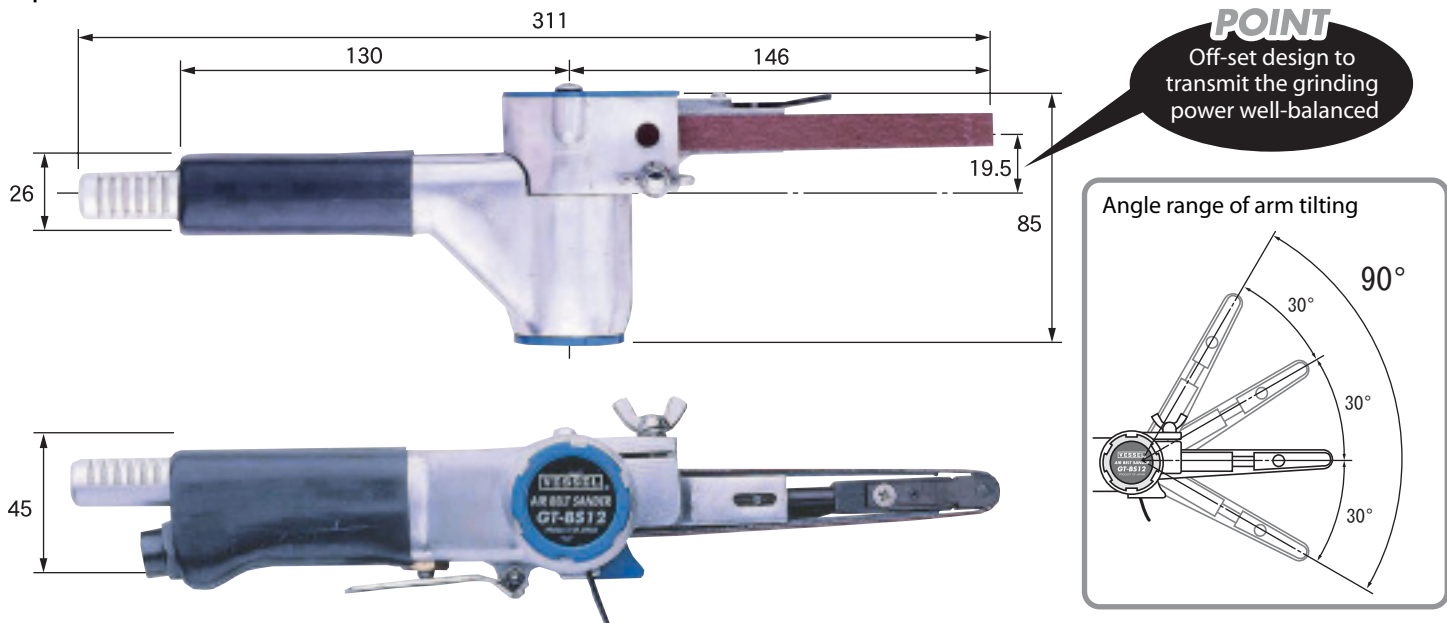

EDP No.	Model No.	Applicable Belt Size	Belt Speed	Air Pressure	Free Speed	Air Consumption	Hose Connector	Overall Length (with Belt)	Weight
310621	GT-BS12	12/10mm × 330mm	1,100m/min	0.6MPa	17,000r.p.m.	0.52m <sup>3</sup> /min	PT1/4	311mm	840g

Accessories: Grit #60 2pcs. / Grit #80 1pc. / L-type Wrench A/F1.5mm 1pc. / Air Coupling(BPB-2) 1pc.

## Ceramic Endless Belt



●Ceramic stone grit is superior for its strength and free from round mesh. Ideal for high grind and sanding capacity in long life.

### Specifications

EDP No.	Model No.	Size	Grit No.	Minimum Quantity(pcs.)
350061	CB12-60	12mm × 330mm	# 60	50
350062	CB12-80	12mm × 330mm	# 80	50



●Before mounting grinding wheels and when-ever the tool is issued for servicing, please disconnect the tool from air supply and make sure throttle returned to off position. ●To use the tools safety, be sure to thoroughly read the relevant instruction manuals and understand the instructions before starting to operate them. ●Recommend to use at air pressure 0.5-0.6MPa at the tool. Excessive, higher air pressure leads to cut the tool life and even dangerous to the operator and lower air pressure will not give enough power which cause of trouble shootings.

**VESSEL CO., INC.**  
OSAKA, JAPAN

Distributed by: